SPECIFICATION



All measurements/figures are approximate. Errors and omissions excepted. Specification and material can be changed without notice. Valid from 2023.01.01 for deliveries until 2024.06.30.



TECHNICAL DATA

нι LV BE DF

A	14.94 m / 49' 0"
JLL LENGTH	13.95 m / 45' 9"
VL	12.90 m / 42' 4"
EAM	4.35 m / 14' 3"
RAUGHT (DWL)	
andard	2.25 m / 7' 5"
mpetition	2.58 m / 8' 6"
keel deep	2.48 m / 8' 2"
allow keel	1.85 m / 7' 1"

competition L-keel deep shallow keel

BALLAST competition L-keel deep

DISPLACEMENT standard competition L-keel deep shallow keel

3.50 t / 7,716 lbs 3.15 t / 6,944 lbs 3.35 t / 7,385 lbs 3.85 t / 8,488 lbs

11.50 t / 25,353 lbs 11.20 t / 24,691 lbs 11.40 t / 25,132 lbs 11.90 t / 26,235 lbs

ENGINE APPROX. FRESH WATER

approx. 450 l/119.00 gal approx. 200 l/53.00 gal

MAST ABOVE WL

MAIN SAIL

FUEL TANK

TOTAL SAIL AREA standard competition

116.73 m² / 1,256 sq ft 126.79 m² / 1,365 sq ft

64.10 m² / 690 sq ft 70.52 m² / 759 sq ft

standard competition

FURLING JIB 105%

52.63 m² / 567 sq ft 56.27 m² / 606 sq ft

SPINNAKER

standard competition

185.38 m² / 1,995 sq ft 214.00 m² / 2,303 sq ft

GENNAKER standard competition

FREERIDE

120.38 m² / 1,296 sq ft 128.50 m² / 1,383 sq ft

RIG standard

l 18.10 m / 59' 5" J 5.50 m / 18' 1" P 17.68 m / 58' 0" E 6.25 m / 20' 6"

l 18.90 m / 62' 0" J 5.50 m / 18' 1" P 18.70 m / 61' 4" E 6.55 m / 21' 6"

CE CERTIFICATE


INTERIOR


DESIGN

DECK AND INTERIOR LAYOUTS Dehler 46 SQ


INTERIOR LAYOUT


DECK LAYOUT

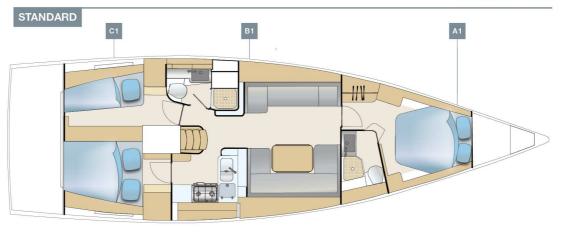

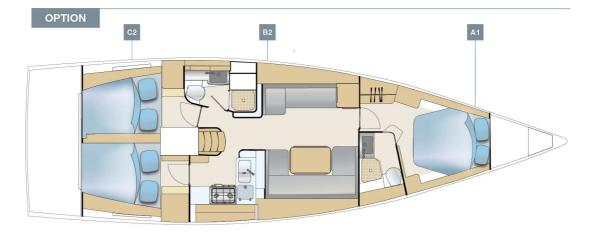

DECK AND INTERIOR LAYOUTS Dehler 46 SQ

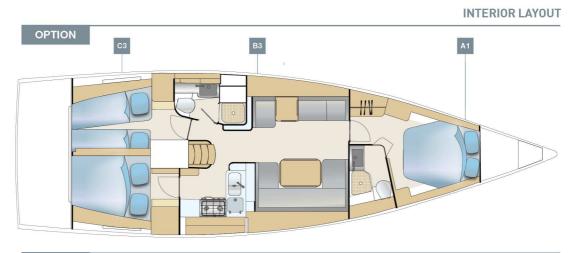

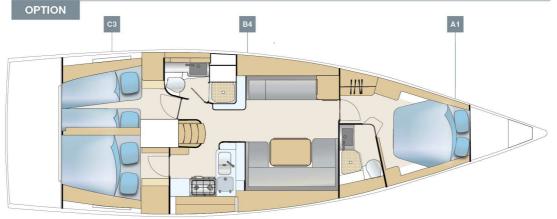

STANDARD SPECIFICATION



HULL

- 6 hull windows (3 each side)
- GRP hull, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinylester resin with PVC foam core built in vacuum infusion
- Waterline and cove line, isophthalic gelcoat, colour: Dark Blue (RAL 5004)

KEEL

- L-keel, cast iron, draft: 2.25 m
- GRP rudder with sea-water resistant aluminium shaft and selfaligning bearings

LAYOUT & INTERIOR

- A1: Master cabin with island double berth, storage space and a head with separate shower stall
- B1: Saloon with L-galley, dining area on stb, long sofa and head with separate shower stall on port
- C1: 2 aft cabins: single berth with locker and storage on port and double berth with locker and storage on stb
- 3-burner gas stove, waste bin, 12 V fridge approx. 130 l, double stainless steel sink with mixing tab
- Interior furniture in high quality marine plywood, satin varnish
- Dehler companionway closing system
- Saloon table, folding with stowage
- Worktop in galley, Off White
- Indirect lights in saloon
- SLS Scenario light system touch screen controller and dimmer in saloon and master cabin

WOOD (FURNITURE, FLOORBOARD)

- Furniture Mahogany
- Floorboard Australian Acacia

UPHOLSTERY

- Mattrasses for all berths
- Upholstery Baltic, colour: creme
- Upholstery Piping (colour selection)

DECK & OUTSIDE EQUIPMENT

- GRP deck with antslip surface, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. Cockpit lockers, stern lockers on port and stb, anchor locker at bow.
- Cockpit bottom, gelcoat colour: Signal White (RAL 9003)
- Teak on coach roof
- Teak on cockpit benches
- Twin wheel steering system with emergency tiller
- 2 stainless steel steering wheels with leather cover
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Halyards and control lines with
- organizers and jammers on coach roof, 4 retractable mooring cleats, handrails on coach roof
- 2 LEWMAR 50 Race manual halyard winches
- 2 LEWMAR 50 Race manual
- secondary winches
- 2 LEWMAR 50 Race manual
- mainsheet winches
- Swimming ladder

- Rub rail, aluminium
- LED backlighted design part on the coach roof
- Helmsman footrests, foldable
- Anchor windlass, electrical with
- automatic fuse
- Composite bowsprit with integrated anchor fitting
- Genoa tracks, incl. cars, adjustable from cockpit
- German mainsheet system with adjustable traveller
- 6 deck hatches openable, anchor locker hatch
- 8 deck coach roof windows openable, portlights in cockpit sides for aft cabins

RIG & SAILS

- Rig, anodized aluminium, keel stepped incl.: dyform rigging, running rigging, kicker, manual jib flat deck furler, "Dehler Quick Reefing System", hydraulic backstay tensioner
- QUANTUM AC5 performance sails full battened, triradial, main and jib
- Dyneema halyards for main and jib

NAVIGATION & INSTRUMENTS

- 2 illuminated compasses at steering pedestal
- Navigation lights LED

PROPULSION

- Fuel tank, approx. 200 l
- Engine (Diesel, approx. 57 hp) saildrive, 3 blade folding propeller

EQUIPMENT

- 12 V and 230 V electric system with main panel, 12 V and 230 V socket and 230 V shore power
- AGM battery set capacity: Starter battery: 1 x 90 Ah, service battery: 1 x 160 Ah
- Country Version: EU / AUS
- Battery charger 35 A
- Manual toilet with sea water flush cabin layout B
- Manual toilet with sea water flush -
- cabin layout A
- Shower unit in cockpit,
- warm-/coldwater
- LPG gas system, stowage for 1 bottle
- Manual and electric bilge pump
- Black water system (appr. 85 I) with deck extraction and seacock for aft head, appr. 35 I in fwd head
- Fresh water system with electric pump and 20 I hotwater, heated also by main engine
- Fresh water tank, appr. 450 l

SHIPPING & TRANSPORT

- CE Certificate cat. A
- Owners manual
- EC Type Examination Certificate